





Sonosystems®

Schunk Ultrasonic Welding Systems DS-20-II

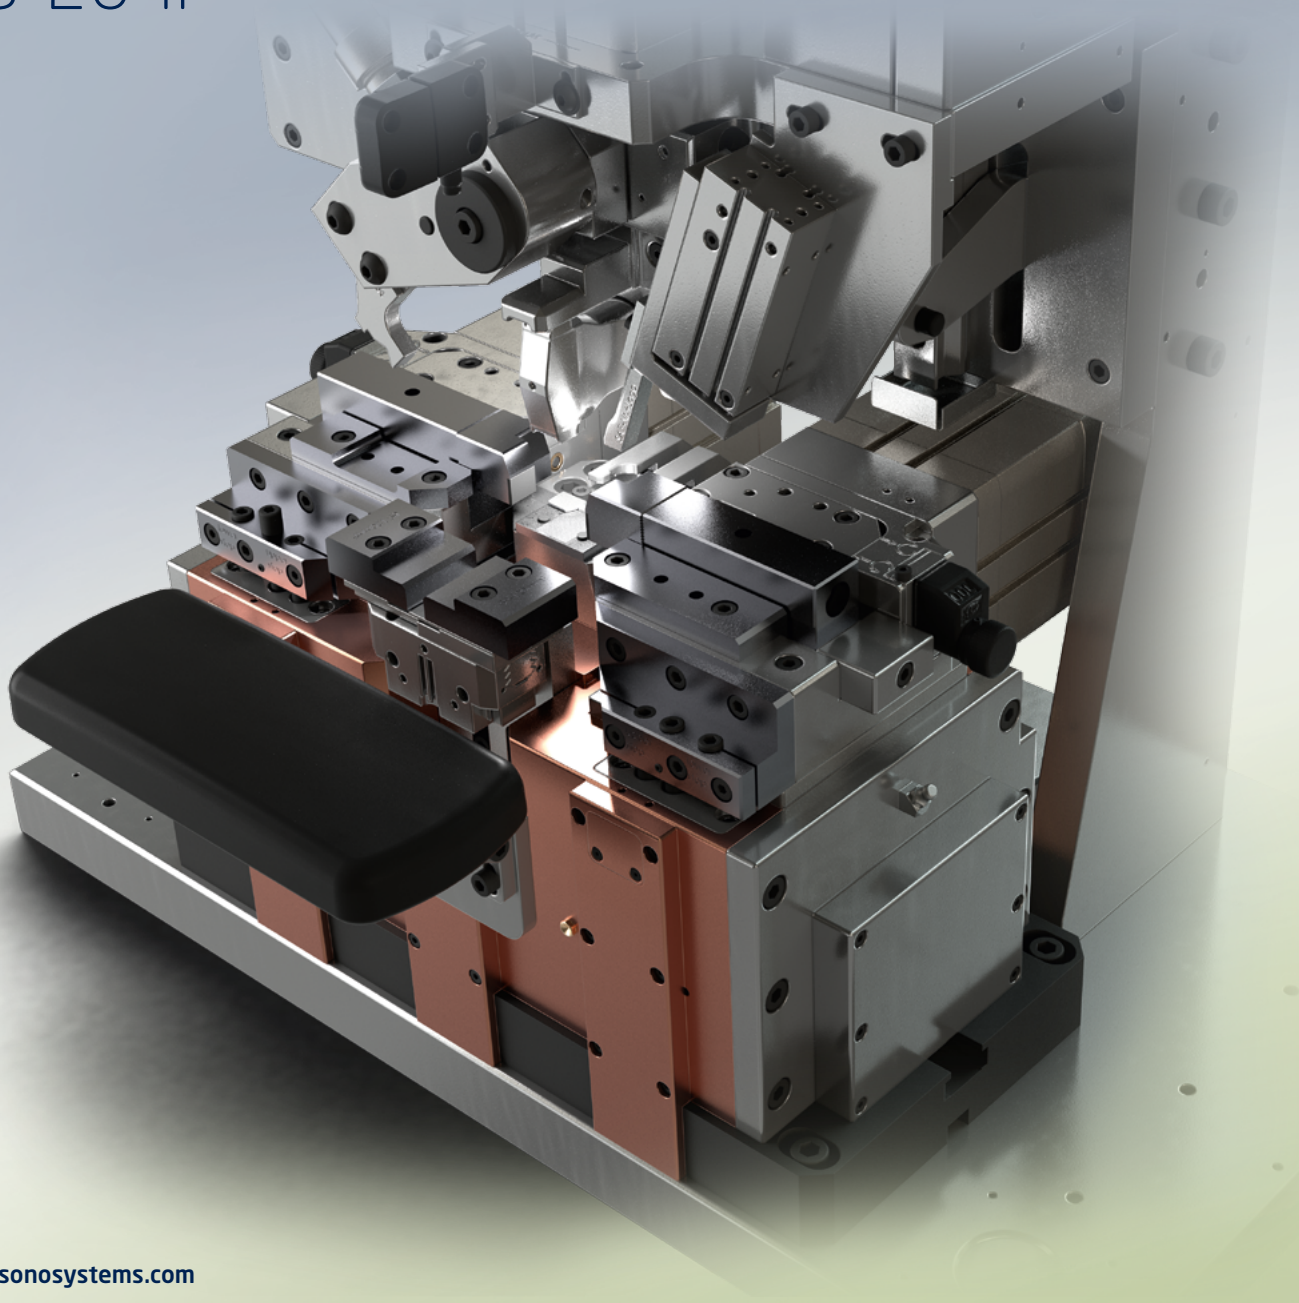

DS-20-II

Wire-to-Terminal Welding Machine

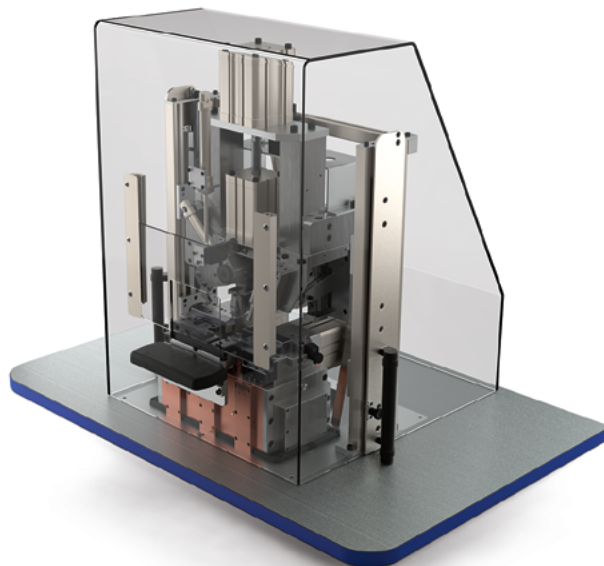

Cross-section range	6 mm ² - 120 mm ²
Generator output	4 / 6 kW
Frequency	20 kHz
Applications	Joining of f. e. Cu-, Al-wires to various contact parts
Features	- Dynamic process control - Network compatible - Multi-weld functions - Comprehensive process data registration - Self explanatory user interface - CE-conformity - Welding area illumination - Modular, flexible adaptable design - Vibration unit rapid-change system - Insulation crimp / faulty-part cutter - Integration into automated assembly lines
Power supply	3 x 400 V, N, PE at 4 / 6 kW oder 3 x 200 V, PE at 4 kW
Compressed air (system pressure)	6.5 bar

Schunk Sonosystems GmbH
Hauptstrasse 95
35435 Wettenberg
Germany
Phone: +49 (0)641 803-0
Fax: +49 (0)641 803-250
sonosystems@schunk-group.com
www.sonosystems.com

